


Drum and Crosby IP Clamps



DRUM & CROSBY® IP CLAMPS



IPHGUZ

The IPVK drum clamp is for vertical lift and transfer. Automatically locks on drum, and can be used alone or in pairs.



IPHGUZ

The IPU10/A automatically click on to the material as soon as the clamp is placed on the plate. The fact that the safety lock remains in position as the clamp closes precludes hazardous situations. Fastening the IPU10/A clamp in places that are difficult to reach is no problem.

MODEL	WORKING LOAD LIMIT (t)*	IPU10 STOCK NO.	WEIGHT EACH (kg.)	DIMENSIONS (mm)									
				Jaw A	B	C	D	E	F	G	H	J	K
DRUM CLAMP - MODEL IPVK													
IPVK	0.5	2700116	1.6	17	26	26	132	29	-	51	-	-	11
CROSBY® IP CLAMP Misc. - MODEL IPU10/A - For vertical transport of plates													
IPU10/A	1	2701628	2.3	0 - 20	45	138	238	40	128	41	37	-	11



10 YEAR LIMITED GUARANTEE AVAILABLE

MAINTENANCE & REPAIR CENTRE AVAILABLE AT SHUTTERLOCK

Know your limitations and then defy them!

PRACTICAL SOLUTIONS FOR SPECIFIC LIFTING PROBLEMS

Contact us

SHOULD YOU REQUIRE ADDITIONAL INFORMATION, PLEASE CONTACT

André Visser | Tel: +27 (0) 71 680 0539 | consultant1@shutterlock.co.za

Gavin Kruger | Tel: +27 (0) 72 719 7856 | consultant2@shutterlock.co.za

Gerhardt van der Heever | Tel: +27 (0) 82 804 8772 | consultant4@shutterlock.co.za

OR CONTACT

SHUTTERLOCK®

AT

Tel: +27 (0) 11 412 2918

www.shutterlock.co.za



Crosby IP
LIFTING CLAMP

VERTICAL CLAMPS



IPU10



IPU10

The IPU10 Vertical Lifting Clamp is used for lifting, turning, moving or vertical transfer of sheet, plates, or fabrications from horizontal to vertical and down to horizontal (180°) as needed. The hinged hoisting eye allows for the clamp to place and lift the load from any direction, or with a multiple leg sling without side-loading the clamp.

The IPU10S is for use on Stainless Steel material.

The IPU10H is for use on materials with a surface hardness to 47Rc (450 HB).

The IP10 vertical lifting clamp is used for the lifting, turning, moving or vertical transfer of sheet, plates, or fabrications from horizontal to vertical and down to horizontal (180°) as needed. Usually used as a single point pick up when used with a spreader beam with multiple vertical drop lines.


The IPNM10 vertical lifting clamp is used for the lifting, turning, moving or vertical transfer of sheet, plates, or fabrications from horizontal to vertical and down to horizontal (180°) as needed with marring the surface of the material. Materials such as aluminium, stainless steel, painted materials, aircraft skins, composite material, glass, plastic, etc. can be lifted without marring. Will NOT mar, or scratch the material surface.




IPU10H



IPNM10N

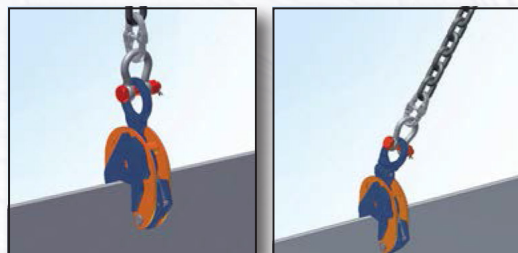

IPU10S

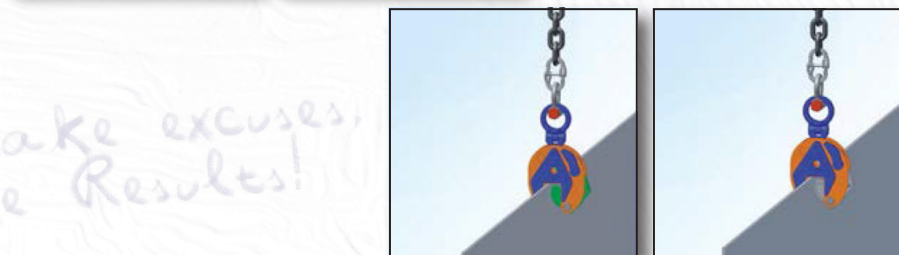

For stainless steel - with universal hoisting eye

For very hard materials - with universal hoisting eye

MODEL	WORKING LOAD LIMIT (t)*	IPU10 STOCK NO.	WEIGHT EACH (kg.)	DIMENSIONS (mm)									
				Jaw A	B	C	D	E	F	G	H	J	K
MODEL IPU10													
IPU10	0.5	2701675	1.9	0 - 16	44	128	228	40	115	41	28	-	11
IPU10	1	2701663	2.4	0 - 20	45	139	222	40	126	41	38	-	11
IPU10	2	2701677	8.5	0 - 35	78	201	372	70	190	61	55	-	16
IPU10	3	2701665	14.8	0 - 40	100	253	445	75	225	78	60	-	20
IPU10	4.5	2701667	16.0	0 - 40	100	253	445	75	232	82	65	-	20
IPU10	6	2701669	24.0	0 - 50	126	302	525	80	292	84	95	44	20
IPU10	9	2701671	29.5	0 - 50	126	325	557	80	310	92	105	44	20
IPU10/S	2	2702277	7.6	0 - 35	78	201	372	70	190	61	55	-	16
IPU10/H	2	2702165	14.8	0 - 40	100	253	445	75	225	78	60	-	20
IPU10/H	3	2702167	16.0	0 - 40	100	253	445	75	232	82	65	-	20
MODEL IP10													
IP10	0.5	2701674	1.8	0 - 16	44	128	207	30	115	41	28	-	10
IP10	1	2701662	2.2	0 - 20	45	139	215	30	126	41	38	-	10
IP10	2	2701676	7.6	0 - 35	78	201	336	70	190	61	55	-	16
IP10	3	2701664	13.8	0 - 40	100	253	436	75	225	78	60	-	20
IP10	4.5	2701666	15.0	0 - 40	100	253	436	75	232	82	65	-	20
IP10	6	2701668	23.5	0 - 50	126	302	515	80	292	84	95	40	20
IP10	9	2701670	27.5	0 - 50	126	325	550	80	310	92	105	44	25
MODEL IPNM10N													
IPNM10N	0.5	2703811	2.7	0 - 10	84	159	235	40	128	60	41	-	11
IPNM10N	1	2703738	4.4	0 - 20	110	209	270	30	134	80	56	-	10

Don't make excuses, make Results!

Crosby IP LIFTING CLAMP

Crosby IP LIFTING CLAMP

Crosby IP
LIFTING CLAMP

Crosby IP LIFTING CLAMP

Crosby IP LIFTING CLAMP

HORIZONTAL CLAMPS & BEAM CLAMPS

MODEL	WORKING LOAD LIMIT (t)*	IPU10 STOCK NO.	WEIGHT EACH (kg.)	DIMENSIONS (mm)									
				Jaw A	B	C	D	E	F	G	H	J	K
MODEL IPH10													
IPH10	2	2703522	5.5	0 - 60	117	16	-	22	109	256	110	20	40
IPH10	3	2703523	7.5	0 - 60	117	20	-	26	109	266	120	20	48
IPH10	6	2703525	13.0	0 - 60	143	25	-	36	123	320	130	20	48
MODEL IPHGUZ - Fixed Hoisting Eye													
IPHGUZ	1.5	2705455	9.0	0 - 25	110	232	287	70	139	90	-	20	16
MODEL IPBKZ													
IPBKZ	1.5	2705781	7.0	5 - 25	62	210	300	70	163	61	50	16	-
MODEL IPBHZ													
IPBHZ	1.5	2705462	6.0	0 - 25	60	200	255	50	153	73	-	35	28
IPBHZ	3	2705463	10.5	0 - 40	80	227	325	70	188	112	-	38	32
MODEL IPTK - with Hoisting Eye													
IPTK	2	2700996	6.0	75 - 190	-	A + 80	125	75	-	-	25	-	20
IPTK	5	2700994	11.0	120 - 350	-	A + 195	125	75	-	-	40	-	20
MODEL IPSTARTEC11													
IPSTARTEC11	1.5	2701812	6.6	6 - 12	140	39	575	110	81	129	54	126	16



IPH10

The IPH10 horizontal lifting clamps with spring loaded tension have a pretension feature that allows the user to attach the clamps to the material for horizontal lifting and transfer of non-sagging material. These clamps must be used in pairs or more.



IPHGUZ

The IPHGZ, IPHGUZ horizontal lifting clamps have a pretension locking feature that allows the user to attach the clamps to the material for horizontal lifting and transfer of sagging and non-sagging material. These clamps may also be used to handle material that will be used in shears, bending and rolling machines or other fabrication equipment. May also be used to move and lift structural shapes such as I-Beams, H-beams etc.



IPBKZ

The IPBKZ beam clamp is used for lifting, transfer and stacking of H-Beams. An over-center hoist eye allows for the beam flange to remain vertical. This series of clamps can be used in the vertical and horizontal moving, transfer and stacking of different types of structural designs, such as H-Beams, angles, etc., depending on the application desired.




IPBHZ

The IPBHZ beam clamp is used for horizontal lifting and transfer of steel beams. The base is slotted to allow the clamps to be used from end of beams as well as from the flange. This series of clamps can be used in the vertical and horizontal moving, transfer and stacking of different types of structural designs, such as I-Beams, H-beams, angles, etc., depending on the application desired.



IPTK

This IPTK series beam clamp is suitable for use as a temporary tackle eye for a beam.

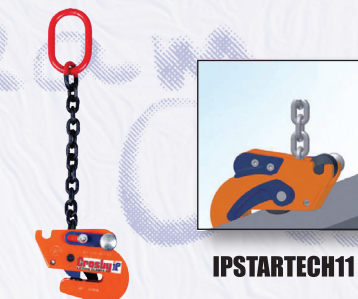

IPSTARTEC11

The IPSTARTEC11 beam clamp has been specially developed for lifting with the body in vertical position, controlled tilting, transportation and stacking of steel "H" and "I" profiles. By placing the chain guide in the appropriate position, it is easy to switch from lifting to tilting and back again, which shifts the centre of gravity.

SHUTTLEBLOCK®